



# LAMP CP22

## COMPACT, HIGH EFFICIENCY ENCLOSURE LAMP

Fitted with Schuko socket and switch, it can be mounted with clips on DIN rail, on a bracket (ALFASTAFF) with screws or with magnetic fixing. It fits exactly one 19" height/unit (44 mm).



ALFASTAFF


Features	Unit	LAMPCP22	LAMPSP22
Power supply	V/Hz	230/50	230/50
Schuko socket	-	Yes 6A	No
Luminosity	Lm	900	
Lamp type	-	high efficiency fluorescent lamp	
Power consumption	W	11	
Service life	hrs	5000	
Switch	-	On/Off for the lamp only	
Connection	-	3-pole terminal for 1.5 mm <sup>2</sup> wire	
Casing	-	Aluminium profile and ABS, UL94 V0, light grey	
Protection degree EN60529	-	IP20	
Protection class	-	Class I, earthed	
Operating temperature	°C(°F)	-20/+50 (-4/+122)	
Storage temperature	°C(°F)	-45/+80 (-49/+176)	
Mounting	-	Clip on DIN rail, magnet or bracket, see ordering code below	
Installation position	-	variable	
Dimensions HxWxD	mm	95x43x277	
Weight (with packaging)	kg	0.76(0.84)	
Package dimensions HxWxD	mm	105x58x310	
Conformity/Certifications	-	CE	

### Versions

Clip mounting on DIN rail	LAMPSP22+CLIP	LAMPSP22+CLIP
Magnet mounting	LAMPSP22+MAGN	LAMPSP22+MAGN
Bracket mounting	LAMPSP22+STAF	LAMPSP22+STAF

### Accessories

Bracket for lamp	ALFASTAFF	ALFASTAFF
Magnet for lamp	ALFAMAGNETE	ALFAMAGNETE
Door limit switch without block	FINCOR	FINCOR
Door limit switch	FINRIP	FINRIP
Safety flashing device with lamp switch	FSL	FSL
Safety flashing device with lamp and auxiliary switches	FSLA	FSLA

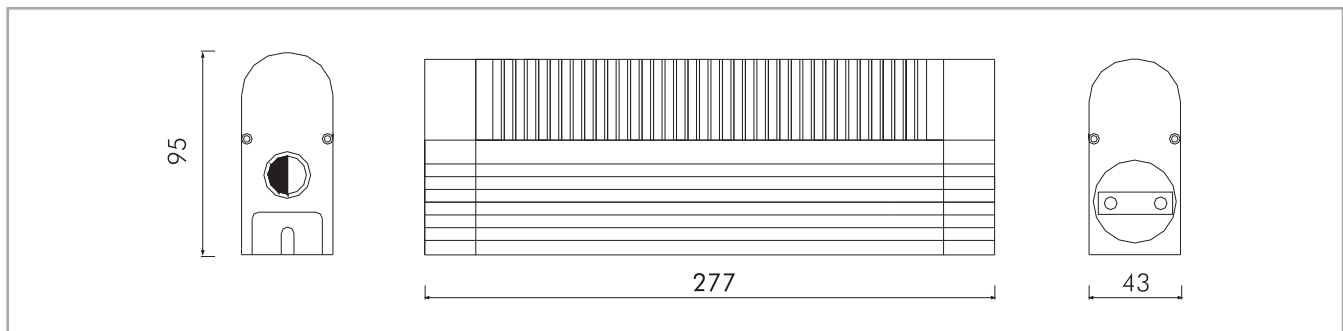

Specifications, values and drawings are subject to change without notice.